



Type

Sub-section

Espace

JE0 X

84

84 REPLACEMENT OF THE LIGHT BULBS ON THE AIR CONDITIONING HEATING CONTROL UNIT

- Engine: XXX
- Gearbox : XXX


Basic manual : M.R. 315

REMOVING DRIVER AND PASSENGER CONTROLS


Remove:

- the headlamp adjustment panel switch mounting and disconnect it,
- the 4 mounting bolts (a),
- the bolt with the hexagonal head holding the control (1).

Remove and disconnect the AC control panel and connectors.

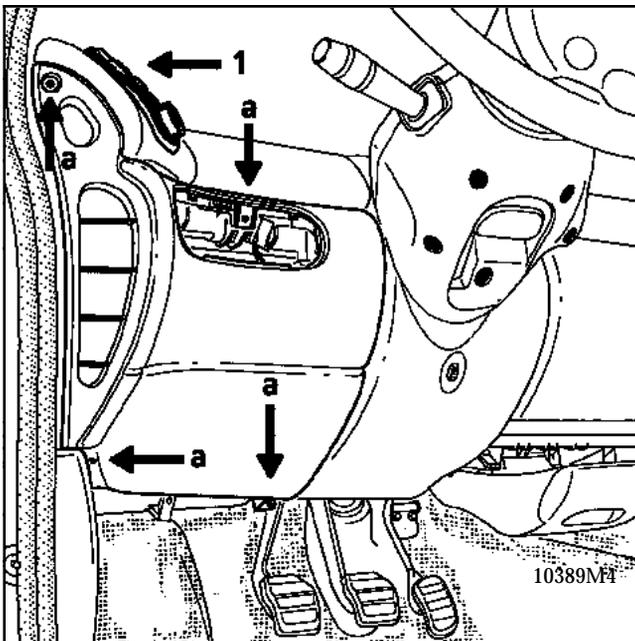

Remove the four bolts on the back of the command.

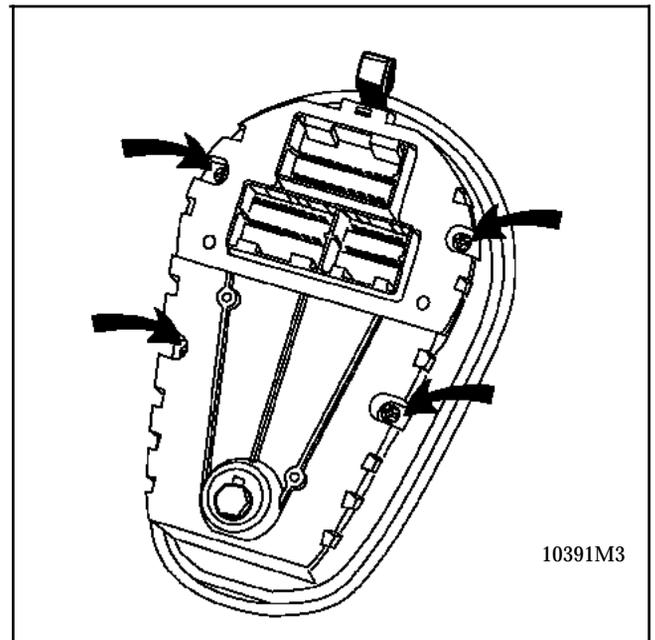

"The repair methods given by the manufacturer in this document are based on the technical specifications current when it was prepared.

The methods may be modified as a result of changes introduced by the manufacturer in the production of the various component units and accessories from which his vehicles are constructed."

All copyrights reserved by Renault.

Copying or translating, in part or in full, of this document or use of the service part reference numbering system is forbidden without the prior written authority of Renault.

REPLACEMENT OF BULBS

To access the bulbs, open the unit.

The bulbs (1, 2 and 4) are short with a hood.
(Part No. : 60 25 370 895).

The bulbs (3 and 5) are long
(Part No. : 60 25 370 894).

REMOVING BULBS


Using a flat blade screwdriver, slacken the bulb by an eighth of a turn, then extract it.

REFITTING BULBS

Using a flat blade screwdriver, tighten the bulb.

REFITTING THE DRIVER AND PASSENGER CONTROL

Refitting is the opposite of removal.

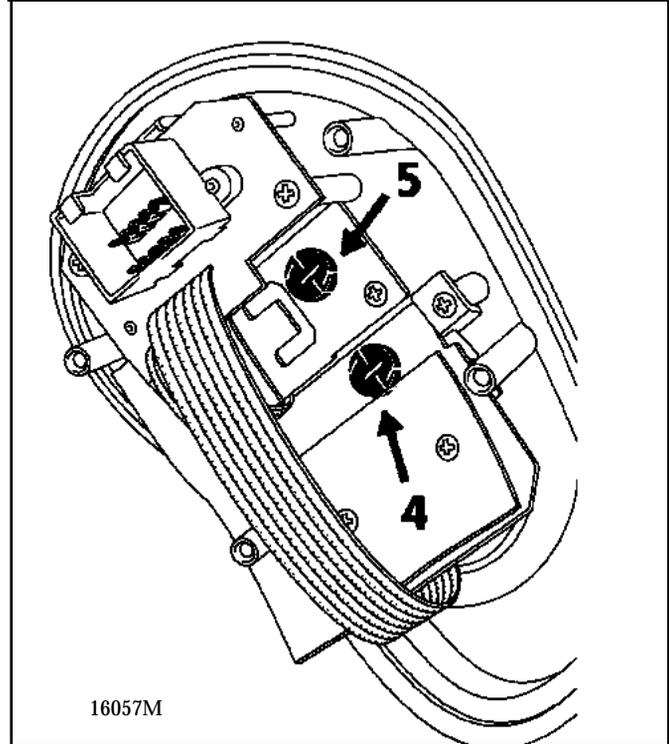

IMPORTANT:
FOLLOW THE SELF CALIBRATION PROCEDURE FOR THE HEATING CONTROLS IF NECESSARY.

